
## Whirlpool Inlet Assembly WHEN REPLACING THE INLET SUCTION GUARD HEAD THE TORQUE SPECIFICATION IS 9 - 11 FT./LBS.

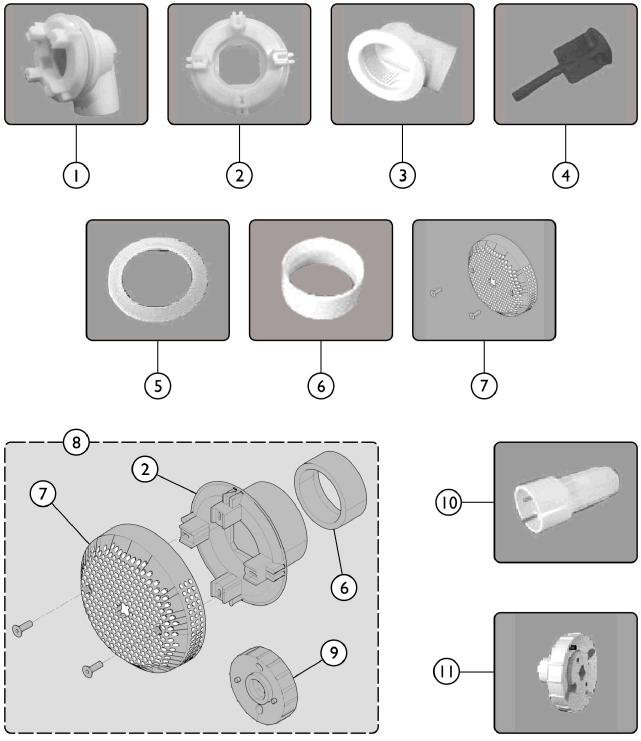

SICC\_074A

## Whirlpool Inlet Assembly WHEN REPLACING THE INLET SUCTION GUARD HEAD THE TORQUE SPECIFICATION IS 9 - 11 FT./LBS.

ltem				Quant	Quantity Per	
Number	Note	Part Number	Description	Package	Assembly	
1	А	PAR7185A	Inlet Suction Assembly	1	1	
2	С	PAR7185G-A	Inlet Suction Guard Head	1	1	
3		PAR7185112-NL A	NLA - Elbow Housing (2 x 1-1/2")	1	1	
4		1095446	Valve, Stem	1	1	
5		PAR7188	Gasket	1	1	
6		PAR9816	Insert, Ring (1-1/2")	1	1	
7	В	PAR7185B-W	Inlet Suction Cover - White	1	1	
8	D	1170078-NLA	Kit, Whirlpool Inlet Assembly	1	1	
2			Inlet Suction Guard Head	1	1	
6			Insert, Ring (1-1/2")	1	1	
7			Inlet Suction Cover - White	1	1	
9			Wrench, Flange Spanner (For Jet Flange and Inlet Suction Guard Heads)	1	1	
			Instruction Sheet	1	1	
10		IHPAR7186	Wrench, Jet Spanner	1	1	
11		IHPAR7187	Wrench, Flange Spanner (For Jet Flange and Inlet Suction Guard Heads)	1	1	
B C	- Includes - Order it	tems 2, 3, 5, and 6. Items 2, 6, 7, and 9. F Items 2, 6, 7, and item 1 Itently available as a se				